



## imageRUNNER ADVANCE DX C259/C359 Series

# CONNECT SECURELY, TRANSFORM DIGITALLY

INNOVATIVE SCAN TECHNOLOGY AND SMART SOFTWARE WORK HAND-IN-HAND

Canon imageRUNNER ADVANCE DX smart multifunction are designed to help lower your running costs with technologies that reduce consumables and energy consumption. Built with Canon's imageRUNNER ADVANCE DNA, state-of-the-art technology and software work hand-in-hand to digitise, automate and optimise content-centric workflows.

Canon's imageRUNNER ADVANCE DX C259/C359 Series offers smart and secure A4 colour multifunction devices, maximising efficiency and providing 360° security for documents, devices and networks. A compact design delivers space-saving office flexibility and configurations without compromising on Canon's unique scanning technologies, which increase scan speed and accuracy for high-quality image processing. Native uniFLOW Online Express (uFOE) software harnesses the power of the cloud to centralise device management and enable cloud collaboration on documents.



**CLOUD  
CONNECTIVITY**



**PRODUCTIVITY**



**SERVICEABILITY**



**SECURITY** **Trellix**



**SUSTAINABILITY**

**Canon**

---

# imageRUNNER ADVANCE DX C259/C359 Series



## CLOUD CONNECTIVITY

- Cloud-based software-as-standard uniFLOW Online Express (uFOE) offers a single integrated solution to increase device security and simplify print management
- Securely scan and print documents from anywhere, with enhanced cloud connectivity
- Re-usable print formats allow easy access to documents in the cloud
- Canon's MEAP platform optimises processes by integrating with document capture and output management solutions such as uniFLOW Online\*
- Device offers native applications such as AirPrint, Mopria, Universal Print by Microsoft and Canon PRINT Business App



## SECURITY

- Verify System at start up supporting Platform Firmware Resiliency (NIST SP800-193) and Automatic Recovery, SIEM support and McAfee Embedded Control analyse the device in real-time to detect and prevent external attacks
- TPM 2.0 (Trusted Platform Module) comes as standard and securely stores encryption keys, such as passwords
- Set up device authentication, two-factor authentication and device function restrictions for both device and cloud-based security measures



## PRODUCTIVITY

- Print and scan up to 35 ppm and 190 ipm
- Automatically file documents with cloud-based Filing Assist from uniFLOW Online\*
- Alleviate concerns for physical device operation, without compromising user experience, by applying\*\* optional antimicrobial film to all common touch points
- Efficiently digitise documents with one-touch workflows and shortcut buttons on the Home screen
- Enable flexible hybrid working and minimise device interaction with continuous user experience through the Canon PRINT Business app
- Boost productivity with stapling of up to 50 sheets with the optional Instant Stapler accessory - small enough to fit on top of devices or desks, anywhere in the office, home or co-working space



## SUSTAINABILITY

- ↳ Eco Recovery mode decreases power consumption to save energy and lower running costs
- ↳ Edit print settings at device-level for accurate scan output
- ↳ Quiet operation and reduced paper hitting sounds during scanning is enabled thanks to technologies such as digital registration and a smooth ADF internal structure
- ↳ Automated and digitised processes minimise paper usage for a paperless office
- ↳ Reduce waste with high-quality scanning, including digital deskewing and advanced stain-resistant glass



## SERVICEABILITY

- Save costs and increase device uptime with innovative enhancements to frequently replaced hardware components as part of our evolving imageRUNNER ADVANCE DX portfolio
- Reduce technician visits with quick, safe, and accurate user replacement of consumable parts
- Long-life parts reduce the frequency of replacement while screw-free fastenings allow parts to be replaced faster and more efficiently

\*uniFLOW Online is available as a Device Based Cloud Subscription for Document Output and Capture Management. Based on business needs, users can upgrade to uniFLOW Online to unlock a range of advanced benefits, including: Increased security with user authentication methods. Personalised workflows to enhance productivity. Reduced wastage by releasing jobs at the device. An intuitive cloud dashboard to leverage real-time data. Greater control over access and usage to reduce print costs.

\*\*C359P Printer model requires optional IC Card Reader unit

NOTE - Certain features are only enabled with the combination of IR ADV DX and uniFLOW Online

## QUICK FACTS



• **Format:** Colour A4

• **Paper Supply Capacity (Max):** 2,300 sheets

• **Warm-up time:** 4 seconds or less

• **Finishing Capabilities:** Collate, Group, Offset\*, Staple\* (\*only with optional Finisher)

• **Supported File Types:** PDF, EPS, TIFF, JPEG, and XPS



• **Print speed:** 25-35 ppm (A4)

• **Scan speed:** 190 ipm (A4)




• **Print Languages:** UFR II, PCL6, Adobe® PostScript 3™

• **Print Resolution:** 1,200 x 1,200

- Enhanced cloud connectivity enables collaborative document access from anywhere, with re-usable formats for easy handling
- Accurate, high-speed scanning is facilitated by Canon's innovative new paper feeding mechanism and stain-resistant glass
- Efficient workflow automation means documents are intuitively scanned, searched and stored with applications including OneDrive, SharePoint, Concur and Dropbox
- Verify System at Start-up, McAfee Embedded Control software alongside other security features offer complete peace of mind and a 360° protection covering document, network and device
- Simplified print management is enabled with centrally-managed print settings and device usage analysis, provided through native uniFLOW Online Express (uFOE)
- Quiet ADF operation, low energy consumption and reduced emissions lower environmental impacts
- Seamlessly integrate into all-sized offices with the space-saving design choice of a desktop or floor-standing unit

## TAILORED SOLUTIONS TO MEET EVERY CHALLENGE

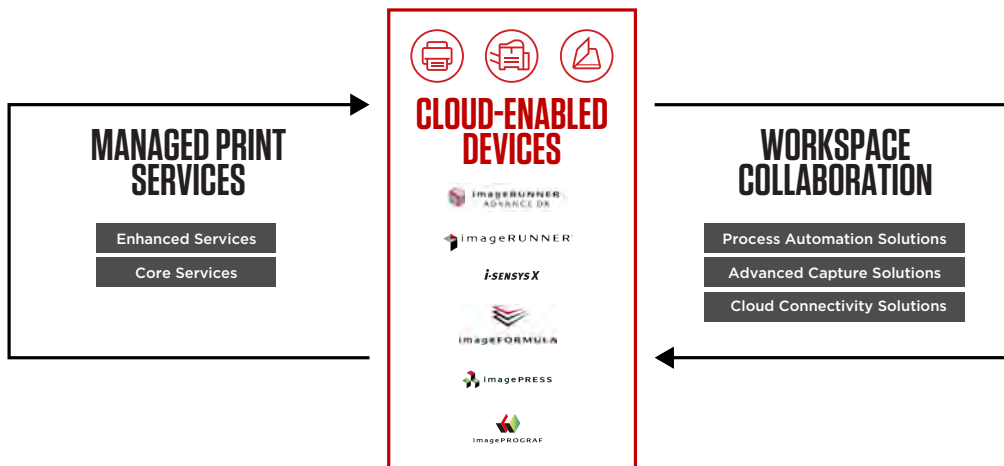

Canon's Digital Transformation Services (DTS), bring together our leading hardware and software into an integrated technology ecosystem, designed to support your transformation journey. This offering combines Managed Print Services and Workspace Collaboration solutions, to help you gain transparency and control over the entire document lifecycle.

Canon Inc.  
canon.com

Canon Europe  
canon-europe.com


English edition  
© Canon Europa N.V., 2023



Canon Europe Ltd.  
B112020201 How: IR-ADV A3 Brand

# COMPACT COLOUR A4 DEVICES WITH STREAMLINED WORKFLOWS FOR FAST, HIGH-QUALITY PRINTING AND SCANNING.

## MAIN CONFIGURATION OPTIONS

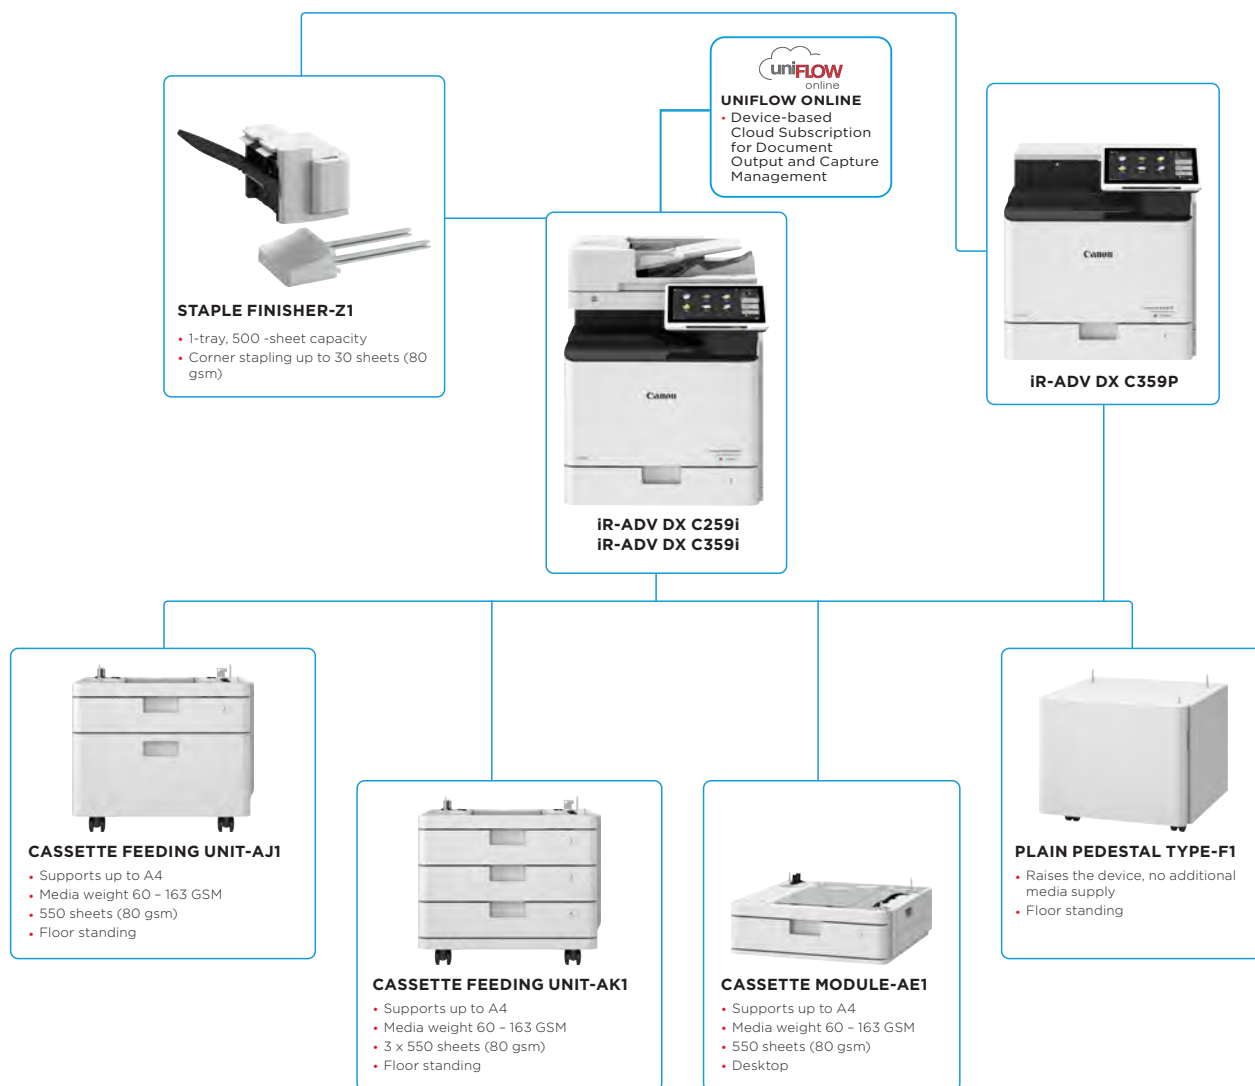

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#).

The Unified Firmware Platform (UFP) ensures that the latest feature upgrades and protection are available, for an enhanced user experience across the entire iR ADVANCE DX portfolio.

# TECHNICAL SPECIFICATIONS

# imageRUNNER ADVANCE DX C259/C359 Series

<b>MAIN UNIT</b>	A4 Colour Laser Multifunctional	<b>Operating System</b>	UFR II: Windows® 8.1/10/11/Server2012/Server2012 R2/Server2016/Server2019/Server2022, Mac OS X (10.11 or later)
<b>Machine type</b>	Print, Copy*, Scan*, Send*, Store and Optional Fax* * Not applicable to iR-ADV DX C359P (Printer model)	<b>COPY SPECIFICATIONS</b>	PCL: Windows® 8.1/10/11/Server2012/Server2012 R2/Server2016/Server2019/Server2022 PS: Windows® 8.1/10/11/Server2012/Server2012 R2/Server2016/Server2019/Server2022, Mac OS X (10.11 or later) PPD: Windows® 8.1/10/11, Mac OS X (10.11 or later)
<b>Core functions</b>	Standard: 3.5GB RAM	<b>Copy Speed* (BW/CL)</b>	iR-ADV DX C359i 35 ppm (A4), 26 ppm (A5R), 61 ppm (A5), 23 ppm (A6) iR-ADV DX C259i 25 ppm (A4), 26 ppm (A5R), 46 ppm (A5), 23 ppm (A6) * Single-sided
<b>Processor</b>	1.8GHz Dual Core Processor	<b>First-Copy-Out Time (A4; BW/ CL)</b>	iR-ADV DX C359i: Approx. 5.1/6.9 seconds or less iR-ADV DX C259i: Approx. 6.9/9.4 seconds or less
<b>Control Panel</b>	10.1" TFT LCD WSVGA Color Touch panel	<b>Copy resolution (dpi)</b>	600 x 600, 300 x 600
<b>Memory</b>	Standard: (SSD) 256 GB	<b>Multiple Copies</b>	Up to 999 copies
<b>Hard Disk drive</b>	Standard: 3.5GB RAM	<b>Copy Density</b>	Automatic or Manual (9 Levels)
<b>Interface Connection</b>	Standard: (SSD) 256 GB	<b>Magnification</b>	Variable zoom: 25% to 400% (1% Increments) Preset reduction/enlargement: 25%, 50%, 70%, 100%(1:1), 141%, 200%, 400%
	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T Optional: Wireless LAN (IEEE 802.11 b/g/n)	<b>Copy Features</b>	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Two-sided Original, Job Build, N on 1, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Copy ID Card, Skip Blank Pages, Color Mode, Reserved copy, Copy Sample
	OTHERS Standard: USB 2.0 (Host) x1, USB 3.0 (Host) x1, USB 2.0 (Device) x1; Optional: Serial Interface, Copy Control Interface	<b>SCAN SPECIFICATIONS</b>	
<b>Paper Supply Capacity (A4, 80gsm)</b>	Standard: 650 Sheets 100-sheets Multi-purpose tray 550-sheets Paper cassette x1 Maximum: 2,300 Sheets (with Cassette Feeding Unit-AK1)	<b>Standard type</b>	Single-pass Duplexing Automatic Document Feeder* [2-sided to 2-sided (Automatic)] * Detect Feeder Multi Sheet Feed is supported.
<b>Paper output capacity (A4, 80gsm)</b>	Standard: 250 Sheets Maximum: 500 Sheets (with Staple Finisher-Z1)	<b>Document Feeder Paper Capacity (80 gsm)</b>	100 Sheets
<b>Finishing capabilities</b>	Standard: Collate, Group With Finisher : Collate, Group, Offset, Staple	<b>Acceptable originals and weights</b>	Platen: Sheet, Book, and 3-Dimensional Objects Document Feeder media weight : 1-sided scanning: 42 to 128 gsm (BW), 64 to 128 gsm (CL) 2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL) Note: Business card: 80 to 220 gsm Original width narrower than A6 except business card: 50 to 128 gsm
<b>Supported media types</b>	Multi-purpose tray: Thin, Plain, Heavy, Recycled, Color, Transparency, Pre-punched, Bond, Label, Envelope Paper Cassette: Thin, Plain, Heavy, Recycled, Color, Pre-punched, Bond, Envelope*	<b>Supported media sizes</b>	Platen scanning size: up to 216.0 x 355.6 mm Document Feeder media size: A4, A5R, A6, B5, Custom size: 48.0 x 128.0 mm to 216.0 x 355.6 mm Business card: 48.0 x 85.0 mm to 55.0 x 91.0 mm
<b>Supported media sizes</b>	Multi-purpose tray: Standard size: A4, A5, A5R, A6, B5, Custom Size: 98.0 x 148.0 mm to 216.0 x 355.6 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5 Envelope custom size: 98.0 x 148.0 mm to 216.0 x 355.6 mm Paper Cassette: Standard size: A4, A5, A5R, A6, B5, Custom size: 98.0 x 190.5 mm to 216.0 x 355.6 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5	<b>Scan Speed (ipm: BW/CL, A4)</b>	<u>Send</u> (300 x 300 dpi): up to 95/190 when Automatic Colour Select "OFF" 1-sided Scanning: 95 2-sided Scanning: 190 Automatic Color Select "ON": 1-sided Scanning: 50 2-sided Scanning: 100 <u>Copy</u> : <u>Scan Speed priority</u> (300 x 600 dpi): 1-sided Scanning: 50 2-sided Scanning: 100 <u>Image Quality priority</u> (600 x 600 dpi): 1-sided Scanning: 30 2-sided Scanning: 50
<b>Supported media weights</b>	Multi-purpose tray: 60 to 220 gsm Cassette: 60 to 163 gsm Duplex: 60 to 163 gsm	<b>Scan Resolution (dpi)</b>	Scan for Copy: up to 600 x 600 Scan for Send: (Push) up to 600 x 600 (SMB/FTP/WebDAV/IFAX), (Pull) up to 600 x 600 Scan for Fax: up to 600 x 600
<b>Warm-up Time</b>	Quick Startup Mode: 4 seconds or less* (applicable to C359i/C259i) * Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display. From Sleep Mode: 10 seconds or Less From Power On: 10 seconds or Less* * iR-ADV DX C359i/C259i: Time from device power-on, until copy ready (not print reservation) * iR-ADV DX C359P: Time from device power-on, until print ready (not print reservation)	<b>Pull Scan Specifications</b>	Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows® 7/ 8.1/ 10/ Server2008/ Server2008 R2/ Server2012/ Server2012 R2/ Server 2016 As of Feb. 2020
<b>Dimensions (W x D x H)</b>	iR-ADV DX C359i/C259i: 519 x 658 x 638 mm iR-ADV DX C359P: 519 x 658 x 525 mm	<b>Scan Method</b>	Push Scan, Pull Scan, Scan to Box, Scan to Advanced Space, Scan to Network, Scan to USB Memory Key, Scan to Mobile devices, Scan to cloud (uniFLOW Online - Optional)
<b>Installation Space(W x D)</b>	Basic: 852 x 908 mm (with Multi-purpose tray extended + paper cassette open) Fully Configured: 1,407 x 908 mm (with Staple Finisher-Z1 + Multi-purpose tray extended + paper cassette open)	<b>SEND SPECIFICATIONS</b>	
<b>Weight</b>	iR-ADV DX C359i/C259i: Approx. 48 kg (including toner) iR-ADV DX C359P: Approx. 41 kg (including toner)	<b>Destination</b>	Standard: E-mail/Internet FAX (SMTP), SMB 3.1.1, FTP, WebDAV, Mail Box Optional: Super G3 FAX, IP Fax (for iR-ADV DX C359i/C259i)
<b>PRINT SPECIFICATIONS</b>		<b>Address Book</b>	LDAP (2,000)/Local (1,600)/Speed dial (200)
<b>Print Speed*</b>	iR-ADV DX C359i/C359P 35 ppm (A4), 26 ppm (A5R), 61 ppm (A5), 23 ppm (A6) iR-ADV DX C259i 25 ppm (A4), 26 ppm (A5R), 46 ppm (A5), 23 ppm (A6) *1-sided	<b>Send resolution (dpi)</b>	Push: up to 600 x 600 Pull: up to 600 x 600
<b>Duplex Print Speed (A4/LTR)</b>	iR-ADV DX C359i/C359P: BW 35ipm/36ipm, CL 35ipm/36ipm C259i: BW 25ipm/26ipm, CL 25ipm/26ipm	<b>Communication protocol</b>	File: FTP(TCP/IP), SMB 3.1.1 (TCP/IP), WebDAV E-mail/I-Fax: SMTP, POP3
<b>Print Resolution (dpi)</b>	600 x 600 to 1,200 x 1,200 (equivalent)	<b>File Format</b>	Standard: TIFF, JPEG, PDF (Compact, Searchable, Apply Adjustment, Sharpen, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages)
<b>Page description languages</b>	Standard: UFR II, PCL6, Adobe® PostScript® 3™	<b>Universal Send Features</b>	
<b>Direct Print</b>	Supported file types: TIFF, JPEG, PDF, EPS, and XPS		
<b>Printing from mobile and cloud</b>	AirPrint, Mopria, Universal Print by Microsoft, Canon PRINT Business, and uniFLOW Online A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information		
<b>Fonts</b>	PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T <sup>†</sup> (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts <sup>†</sup> *† Optional PCL International Font Set-A1 is required. ** Optional Barcode Printing Kit-D1 is required.		
<b>Print Features</b>	Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Toner Reduction, Poster Printing, Forced Hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer		



# TECHNICAL SPECIFICATIONS

# imageRUNNER ADVANCE DX C259/C359 Series

## FAX SPECIFICATIONS

Maximum Number of Connection Lines	(Optional) 2 (2nd Line optional)
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps
Compression Method	MH, MR, MMR, JBIG
Resolution (dpi)	400x400 (Ultra Fine), 200x400 (Super Fine), 200x200 (Fine), 200x100 (Normal)
Sending/Recording Size	A4, A5*, A6*, B5*/A4, A5, B5 *Sent as A4
FAX memory	Up to 30,000 pages (2,000 jobs)
Speed dials	Max. 200
Group dials/destinations	Max. 199 dials
Sequential broadcast	Max. 256 addresses
Memory backup	Yes
Fax Features	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log

## STORE SPECIFICATIONS

Mail Box (Number supported)	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 10,000 Pages (2,000 jobs) Stored
Advanced Space	Communication Protocol: SMB or WebDAV Supported Client PC: Windows* 8.1/10 Concurrent Connections (Max.): SMB:64, WebDAV:3
Advanced Space available disc space	Approx. 16GB
Advanced Space Features	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support, Search, File Preview, Authentication Management, Open to public, URI TX, Backup/Restore

## SECURITY SPECIFICATIONS

Authentication and Access Control	User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)
Document Security	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print**), Receive Data Security (Confidential Fax In-box Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, Adobe LiveCycle® Rights Management ES2.5 Integration), BOX Security (Mail Box Password Protected, Advanced Space Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Document Tracking (Secure Watermark) ** Requires uniFLOW Online / uniFLOW
Network Security	TLS 1.3, FTPS, IPsec, IEEE802.1X authentication, WPA3 support (Wi-Fi), SNMP V3.0, Firewall Functionality k(IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Disabling Unused Functions (Enabling/Disabling Protocols/Applications, Enabling/Disabling Remote UI, Enabling/Disabling USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Prohibit the execution of files stored in Advanced Space in the MFP, Scan and Send -Virus Concerns for E-mail Reception
Device Security	Protecting SSD Data [SSD Data Encryption (FIPS 140-2/140-3*), SSD Lock], Standard SSD Initialize, Trusted Platform Module (TPM 2.0), Job Log Conceal Function, Protecting MFD Software Integrity, Checking MFD Software Integrity & Platform Firmware Resiliency (NIST SP800-193) with Automatic System Recovery (Verify System at Startup, Runtime Intrusion Detection), Comply IEEE2600.2 (Common Criteria Certification) *validation pending
Device Management and Auditing	Administrator Password, Digital Certificate And Key Management, Remote Management Two-factor Authentication, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting Device administration and Security administration Passwords

## ENVIRONMENTAL SPECIFICATIONS

Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)
Power source	220-240 V, 50/60 Hz, 3.9 A
Power consumption	Maximum: Approx. 1,500 W Copying (iR-ADV DX C359i/C259i with DADF continuous scan): 575.4 W* <sup>1</sup> Printing (iR-ADV DX C359P) [LAN Print (color mode, duplex, with Cassette Feeding unit-AK1)]: 488.5 W* <sup>1</sup> Standby: Approx. 40.3 W* <sup>1</sup> Sleep mode: Approx. 0.8 W* <sup>2</sup> * <sup>1</sup> Reference value: measured one unit * <sup>2</sup> 0.8 W sleep mode is not available in all circumstances due to certain settings. Typical Electricity Consumption (TEC)*: iR-ADV DX C359i/C359P: 0.33kWh iR-ADV C259i: 0.22kWh *As per USA Energy Star 3.0
Noise levels	For detailed information relating to Erp:Lot6/26 regulation, please go to: <a href="https://www.canon-europe.com/for_work/lot26/">https://www.canon-europe.com/for_work/lot26/</a> <b>Sound Power Level (LWA, m)*</b> Active (BW) (1-sided): iR-ADV DX C359i/C359P: 65 dB, Kv 3 dB iR-ADV DX C259i: 62 dB, Kv 3 dB * Reference value: measured only one unit with ISO7779, described with ISO9296 (2017) <b>Sound Pressure (LpAm)</b> Bystander's position: Active (BW) (1-sided): iR-ADV DX C359i/C359P: 52 dB* iR-ADV DX C259i: 49 dB* Standby: iR-ADV DX C359i/C359P/C259i: 8 dB * Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)
Standards	Blue Angel

## CONSUMABLES

Toner Cartridges	C-EXV 55 Toner BK/C/M/Y
Toner (Estimated Yield @ 5% Coverage)	C-EXV 55 TONER BK: 23,000 pages C-EXV 55 TONER C/M/Y: 18,000 pages

## SOFTWARE AND PRINTER MANAGEMENT

Tracking and reporting	For detailed information please visit our website <a href="https://www.canon-europe.com/business/">https://www.canon-europe.com/business/</a> Universal Login Manager (ULM) uniFLOW Online Express* * For more information, please refer to <a href="#">uniFLOW Online Express</a> <a href="#">uniFLOW Online</a>
Remote management tools	iW Management Console eMaintenance Content Delivery System
Scanning software	Network ScanGear
Platform	MEAP (Multifunctional Embedded Application Platform)
Document Publishing	Kofax PowerPDF (optional)

## PAPER SUPPLY OPTIONS

Cassette Module-AE1	Paper Capacity: 550 sheets (80 gsm) Paper Type: Thin, Plain, Heavy, Recycled, Color, Pre-punched, Bond Paper Size: A4, A5R, B5, Custom size: 98.0 x 190.5 mm to 216.0 x 355.6 mm Paper Weight: 60 to 163 gsm Power Source: From the Main Unit Dimensions (W x D x H): 511 x 508 x 159 mm (attached to the main unit) Weight: Approx. 10 kg
Cassette Feeding Unit-AJ1	Paper Capacity: 550 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Heavy, Color, Pre-punched, Bond Paper Size: A4, A5R, B5 Custom size: 98.0 x 190.5 mm to 216.0 x 355.6 mm Paper Weight: 60 to 163 gsm Power Source: From the Main Unit Dimensions (W x D x H): 511 x 508 x 425 mm (attached to the main unit) Weight: Approx. 16 kg
Cassette Feeding Unit-AK1	Paper Capacity: 550 sheets (80 gsm) x 3 cassettes Paper Type: Thin, Plain, Recycled, Heavy, Color, Pre-punched, Bond Paper Size: A4, A5R, B5 Custom size: 98.0 x 190.5 mm to 216.0 x 355.6 mm Paper Weight: 60 to 163 gsm Power Source: From the Main Unit Dimensions (W x D x H): 511 x 508 x 425 mm (attached to the main unit) Weight: Approx. 19 kg



# TECHNICAL SPECIFICATIONS

# imageRUNNER ADVANCE DX C259/C359 Series

## OUTPUT OPTIONS\*

### Staple Finisher-Z1

\*Paper capacity may vary with different paper type/size.

Tray Capacity (80 gsm):  
A4, A5, A5R, A6, B5: 500 sheets  
Paper Weight: 60 to 220 gsm  
Staple Position: Corner  
Staple Capacity:  
A4, B5: 30 sheets (60 to 105 gsm)  
Power Source: From the Main Unit  
Dimensions (W x D x H): 555 x 459 x 301 mm (Unit size)  
Weight: Approx. 14 kg

## HARDWARE ACCESSORIES

### Card Readers

Various card readers available e.g. MiCard Plus. Please contact local Canon Office for more details.  
Copy Card Reader-F1  
Copy Card Reader Attachment-B5

## SYSTEM AND CONTROLLER OPTIONS

### Print Accessories

PCL International Font Set-A1

### Barcode Printing

Barcode Printing Kit-D1

### System Accessories

Copy Control Interface Kit-A1  
Wireless LAN Board-D1  
Serial Interface Kit-K3

### FAX Accessories

Super G3 FAX Board-BL1  
Remote Fax Kit-A1  
IP FAX Expansion Kit-B1

## OTHER OPTIONS

### Accessibility Accessories

ADF Access Handle-A1

### Consumables

Staple-P1

## Software & Solutions



## Certifications and compatibility



**Canon Ireland**  
3006 Lake Drive  
Citywest, Saggart  
Co. Dublin, Ireland  
Telephone No: 01 2052400  
Facsimile No: 01 2052525  
canon.ie

**Canon (UK) Ltd**  
The Bower  
4 Roundwood Avenue  
Stockley Park  
Uxbridge  
UB11 1AF

**Canon Electronics Inc.**  
canon-elec.co.jp  
**Canon Europe**  
canon-europe.com  
English edition  
© Canon Europa N.V., 2023